

Backup OM component - OMLEX

Backup OM component by Acronis - English

Written By: Petr Roupec

OMLEX

Replacing HMI system won't add one single Megawatt to your plant So keep your current HMI running


NETWORK BASED OM650 COMPONENTS

BACKUP



- Acronis bootable CD (1)
- Backup Server (1)


Step 1 — Booting Computer

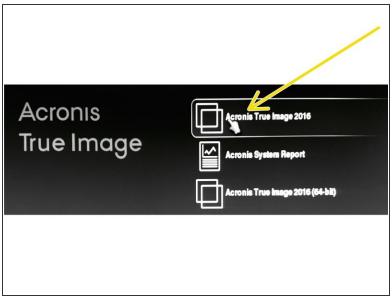





- Insert Acronis Bootable CD/DVD and select Acronis True Image 2016
- After while computer will boot up

Step 2 — Network Setup

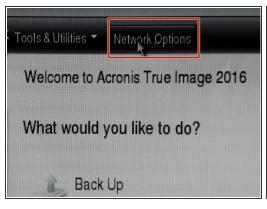

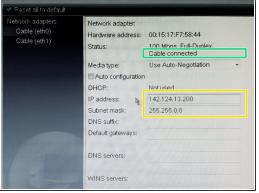

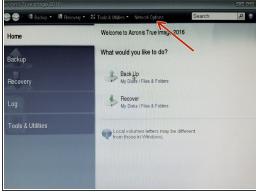


- Select menu "Network Options"
 - Check that network cable is connected
- Setup unique IP address in same network as backup server
 - / IP address MUST NOT COLLIDE with IP addresses of existing computers

Step 3 — Start Back Up Procedure







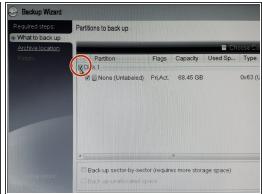


- Select Back Up
- Select "Disk and Partition Backup"
- Select entire disk to Backup

Step 4 — Archive location

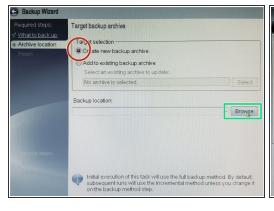


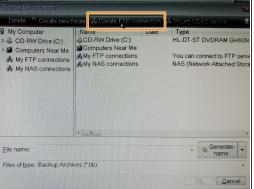

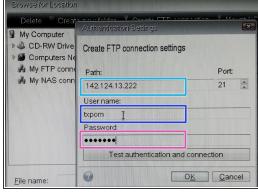


- Select option "Create new backup archive" and hit button "Browse"
- Then click on "Create new ftp connection"
- - ftp server IP address
 - User name
 - Password

Step 5 — FTP Server connection and Backup Directory

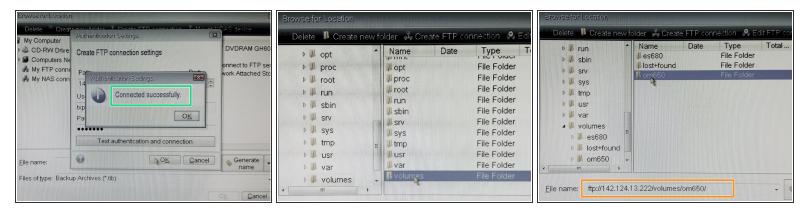


- After creating new ftp connection you can browse server backup directories
- Locate directory to which backup image will be stored to
- (i) Bohemia Market data storage is located at /volumes/om650

Step 6 — Back Up file name

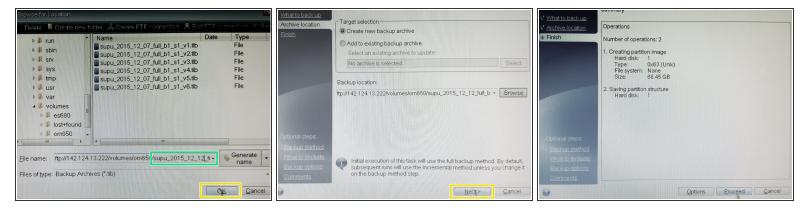

- Type Backup File name
- Click "OK" when ready, verify next page and if happy press "Next" button and backup summary will be shown.
- (i) Bohemia Market recommends that name of Back Up file contains:
 - Name of the computer
 - Date of backup

Step 7 — Proceed with Back Up

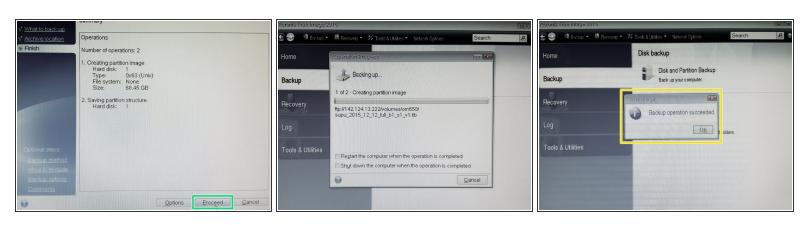

- Hit "Proceed" button to begin with Back Up
- After while Back Up will complete
- (i) Length of backup vary between 15 minutes to hour or so. It depends on the size of the disk and speed of network.